


# Screw Drive GP 22 S Ø22 mm, Metric Lead Screw

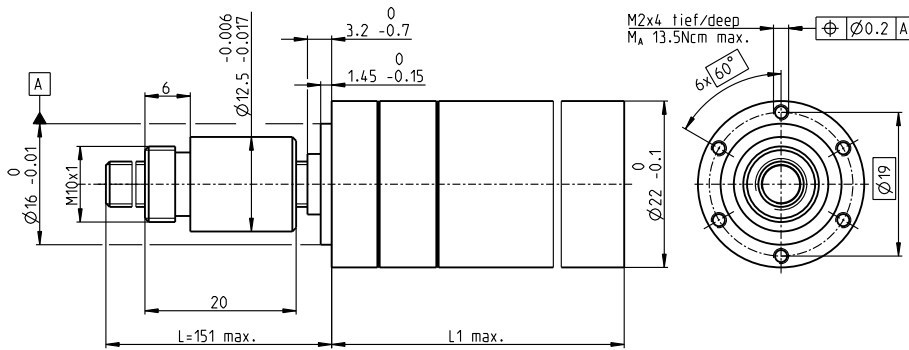

## Technical Data

Screw	M6 x 1, stainless steel
Standard length	151 mm
Special length (5 mm steps)	max. 300 mm
Nut (standard)	thread nut
Material	bronze
Axial play	< 0.008 mm
Planetary gearhead	straight teeth
Bearing	ball bearing/thrust roller bearing
Radial play, 5 mm from flange	< 0.05 mm
Axial play	preloaded
Max. continuous input speed <sup>2</sup>	8000 rpm
Recommended temperature range	-15...+80°C
Max. axial load (static) <sup>1</sup>	550 N
Number of stages	0 1 2 3 4
Max. radial load, 15 mm from flange	80 N 80 N 130 N 180 N 180 N

M 1:1

- Stock program
- Standard program
- Special program (on request)

## Part Numbers

Screw Drive Data	363826	363827	363830	363834	363835	363840	363845	363850	363855
1 Reduction	1:1	3.8:1	14:1	29:1	53:1	89:1	198:1	333:1	479:1
2 Absolute reduction	1/1	15/4	225/16	729/25	3375/64	4617/52	50625/256	6925/208	124659/260
20 Max. feed velocity <sup>1</sup>	mm/s	101	35	9.5	4.6	2.5	0.7	0.4	0.3
21 Max. feed force (continuous) <sup>1</sup>	N	42	60	92	118	144	223	266	300
22 Max. feed force (intermittent) <sup>1</sup>	N	118	167	259	330	350	350	350	350
<b>Part Numbers</b>		363828	364040		363836	363841	363846	363851	363856
1 Reduction		4.4:1	16:1		62:1	104:1	231:1	370:1	561:1
2 Absolute reduction		57/13	885/62		12825/208	87723/645	192375/632	10556001/28561	2368521/4225
20 Max. feed velocity <sup>1</sup>	mm/s	30	8.3		2.2	1.3	0.6	0.4	0.2
21 Max. feed force (continuous) <sup>1</sup>	N	63	97		152	180	235	275	316
22 Max. feed force (intermittent) <sup>1</sup>	N	176	270		350	350	350	350	350
<b>Part Numbers</b>		363829	363831		363837	363842	363847	363852	363857
1 Reduction		5.4:1	19:1		72:1	109:1	270:1	389:1	590:1
2 Absolute reduction		27/5	3249/169		48735/676	2187/20	731025/2704	263169/676	59049/100
20 Max. feed velocity <sup>1</sup>	mm/s	25	7.0		1.9	1.2	0.5	0.3	0.2
21 Max. feed force (continuous) <sup>1</sup>	N	67	102		159	183	248	280	321
22 Max. feed force (intermittent) <sup>1</sup>	N	188	286		350	350	350	350	350
<b>Part Numbers</b>			363832		363838	363843	363848	363853	363858
1 Reduction			20:1		76:1	128:1	285:1	410:1	690:1
2 Absolute reduction			81/4		1215/16	41553/325	18225/64	6561/16	1121931/1625
20 Max. feed velocity <sup>1</sup>	mm/s		6.7		1.8	1.0	0.5	0.3	0.2
21 Max. feed force (continuous) <sup>1</sup>	N		104		162	193	252	285	339
22 Max. feed force (intermittent) <sup>1</sup>	N		291		350	350	350	350	350
<b>Part Numbers</b>			363833		363839	363844	363849	363854	363859
1 Reduction			24:1		84:1	157:1	316:1	455:1	850:1
2 Absolute reduction			1539/65		185193/2197	19683/125	2777895/6788	5000211/10985	531441/625
20 Max. feed velocity <sup>1</sup>	mm/s		5.6		1.6	0.8	0.4	0.3	0.2
21 Max. feed force (continuous) <sup>1</sup>	N		111		168	207	261	295	350
22 Max. feed force (intermittent) <sup>1</sup>	N		310		350	350	350	350	350
4 Number of stages		0	1	2	3	3	4	4	4
7 Max. efficiency gearhead incl. screw	%	42	35	29	29	25	20	20	20
8 Weight <sup>1</sup>	g	103	103	116	116	128	128	141	141
9 Average backlash no load	°	1.0	1.0	1.2	1.2	1.6	1.6	2.0	2.0
23 Mechanical positioning accuracy <sup>1</sup>	mm	0.034	0.034	0.034	0.034	0.034	0.037	0.037	0.037
10 Mass inertia gearhead incl. screw <sup>1</sup>	gcm <sup>2</sup>	10	1.0	0.4	0.4	0.3	0.3	0.3	0.3
11 Gearhead length L1	mm	38.0	38.0	44.8	44.8	51.6	51.6	58.4	58.4

<sup>1</sup> based on screw length 151 mm (standard length)    <sup>2</sup> for reduction 1:1 = 6088 rpm



## maxon Modular System

+ Motor	Page	+ Sensor/Brake	Page	Overall length [mm] = Motor length + gearhead length + (sensor/brake) + assembly parts							
A-max 19	143-146			-	64.2	71.0	71.0	77.8	77.8	84.6	84.6
A-max 19, 1.5 W	144	MR	416/417	-	69.3	76.1	76.1	82.9	82.9	89.7	89.7
A-max 19, 1.5 W	144	Enc 22	426	-	78.6	85.4	85.4	92.2	92.2	99.0	99.0
A-max 19, 1.5 W	144	MEnc 13	407	-	71.7	78.5	78.5	85.3	85.3	92.1	92.1
A-max 19, 2.5 W	145/146			-	66.8	73.6	73.6	80.4	80.4	87.2	87.2
A-max 19, 2.5 W	146	MR	416/417	-	71.1	77.9	77.9	84.7	84.7	91.5	91.5
A-max 19, 2.5 W	146	Enc 22	426	-	81.2	88.0	88.0	94.8	94.8	101.6	101.6
A-max 19, 2.5 W	146	MEnc 13	407	-	74.3	81.1	81.1	87.9	87.9	94.7	94.7
A-max 22	147-150			-	67.2	74.0	74.0	80.8	80.8	87.6	87.6
A-max 22	148/150	MR	416/417	-	72.2	79.0	79.0	85.8	85.8	92.6	92.6
A-max 22	148/150	Enc 22	426	-	81.6	88.4	88.4	95.2	95.2	102.0	102.0
A-max 22	148/150	MEnc 13	407	-	74.3	81.1	81.1	87.9	87.9	94.7	94.7
EC-max 16, 8 W	221			-	71.4	78.2	78.2	85.0	85.0	91.8	91.8
EC-max 16, 8 W	221	MR	403	-	78.7	85.5	85.5	92.3	92.3	99.1	99.1
EC-max 22, 12 W	222			-	70.1	76.9	76.9	83.7	83.7	90.5	90.5
EC-max 22, 12 W	222	MR	403	-	79.8	86.6	86.6	93.4	93.4	100.2	100.2
EC-max 22, 12 W	222	AB 20	478	-	105.7	112.5	112.5	119.3	119.3	126.1	126.1